

CONTRACTORS

SPECIFIERS

ARCHITECTS



# Sirius


Performance Fabrics for Vertical & Roller Blinds

ARCHITECTS

SPECIFIERS

CONTRACTORS

CI/SFB 1976 reference by Sfb Agency			
(76.7)	X		





# Sirius

## Performance Fabrics for Vertical & Roller Blinds

COLOUR RANGE	6
LOUVRE WIDTHS AVAILABLE	89mm (3½"), 127mm (5") other widths available on request
ROLLER BLIND WIDTH	2.00m (78")
FABRIC COMPOSITION	100% polyester
FABRIC WEIGHTS	260g/m <sup>2</sup> (7.7oz/yd <sup>2</sup> )
FLAMMABILITY STANDARDS	Complies with BS 5867 (1980 Part 2, Type B) CAN/ULC-S109-03 NFPA 701 (Large & Small) AS/NZS 1530.3 – 1999
COLOUR FASTNESS	Tested in accordance with BS EN ISO 105-B01:1999
CLEANING	Machine washable (vertical blind fabrics only) See manufacturer's instructions. Tested in accordance with BS EN 26330:1994 method 7a
ULTRAVIOLET PROTECTION FACTOR (UPF)	The UPF protection factor is comparable to the sun protection factor of sunscreen which can vary considerably depending on the individual skin types. When protected by a textile material with a UPF of 80, for example, this individual can extend how long they are able to stay in the sun by a factor of 80, in other words, up to a maximum of 80 x 5 min = 400 min to 80 x 10 min = 800 min, without risking damage to their skin.
AVAILABILITY	Ex-stock
FABRIC SAMPLES	Available on request

### AT A GLANCE



vertical blind



roller blind



flame retardant



solar protective coating



anti-glare fabric - with advanced light reflecting properties



machine washable  
(vertical blind fabrics only)




UV Protection Factor tested to European UV Standard 801



Colours reproduced here may vary from the actual colours due to the limitations of the printing process. Great care has been taken to ensure that the fabric swatches and the information supplied are correct, however specifiers and customers are advised to check the suitability of materials before use.


LARGER SAMPLES ARE AVAILABLE ON REQUEST.

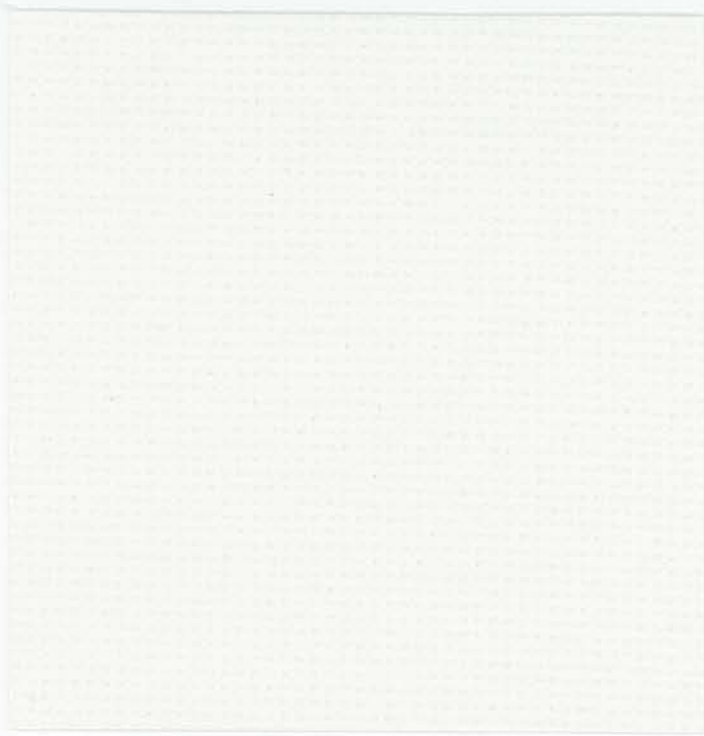

cream



ice



blush



maize



slate



royal

Fabrics are best viewed at 200% resolution to give best indication of colour. Better still please contact us for physical samples.



# Sirius

## Performance Fabrics for Vertical & Roller Blinds

COLOUR RANGE	6
LOUVRE WIDTHS AVAILABLE	89mm (3½"), 127mm (5") other widths available on request
ROLLER BLIND WIDTH	2.00m (78")
FABRIC COMPOSITION	100% polyester
FABRIC WEIGHTS	260g/m <sup>2</sup> (7.7oz/yd <sup>2</sup> )
FLAMMABILITY STANDARDS	Complies with BS 5867 (1980 Part 2, Type B) CAN/ULC-S109-03 NFPA 701 (Large & Small) AS/NZS 1530.3 – 1999
COLOUR FASTNESS	Tested in accordance with BS EN ISO 105-B01:1999
CLEANING	Machine washable (vertical blind fabrics only) See manufacturer's instructions. Tested in accordance with BS EN 26330:1994 method 7a
ULTRAVIOLET PROTECTION FACTOR (UPF)	The UPF protection factor is comparable to the sun protection factor of sunscreen which can vary considerably depending on the individual skin types. When protected by a textile material with a UPF of 80, for example, this individual can extend how long they are able to stay in the sun by a factor of 80, in other words, up to a maximum of 80 x 5 min = 400 min to 80 x 10 min = 800 min, without risking damage to their skin.
AVAILABILITY	Ex-stock
FABRIC SAMPLES	Available on request

### AT A GLANCE



vertical blind



roller blind



flame retardant



solar protective coating



anti-glare fabric - with advanced light reflecting properties



machine washable  
(vertical blind fabrics only)



UV Protection Factor tested to European UV Standard 801



Colours reproduced here may vary from the actual colours due to the limitations of the printing process. Great care has been taken to ensure that the fabric swatches and the information supplied are correct, however specifiers and customers are advised to check the suitability of materials before use.

LARGER SAMPLES ARE AVAILABLE ON REQUEST.