





CENTURY

PERFORMANCE FABRIC for
VERTICAL & ROLLER BLINDS




Dearnleys




Pentel

CENTURY

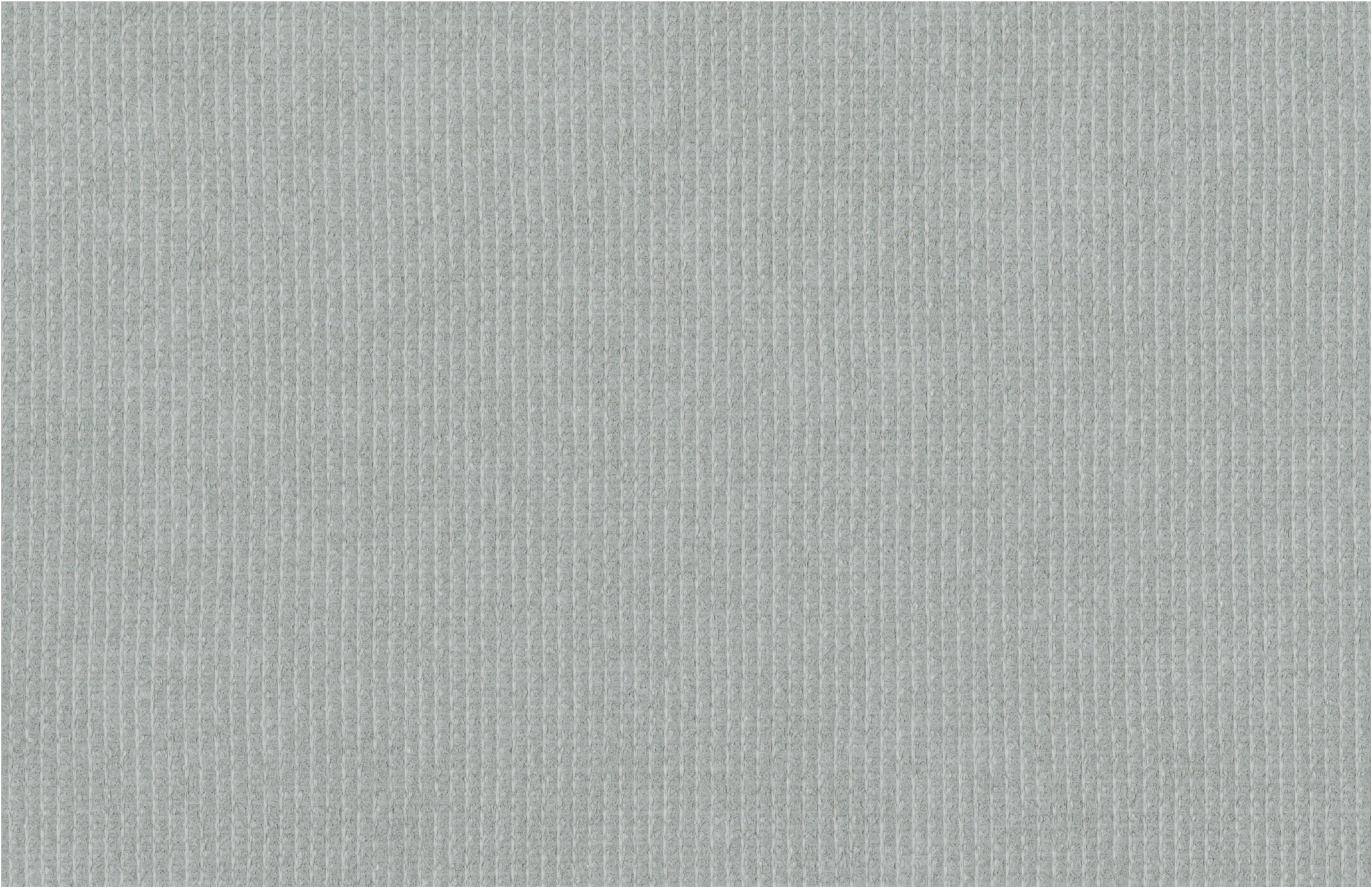


FLINT




WHITE

2m
89mm & 127mm




SILVER

2m
89mm & 127mm



FLINT

2m
89mm & 127mm




CHARCOAL

2m
89mm & 127mm




CHALK

2m
89mm & 127mm



PARCHMENT

2m
89mm & 127mm



ROYAL BLUE

2m
89mm & 127mm



JET BLACK

2m
89mm & 127mm



WIPE CLEAN
& ULTRA-FRESH


ROLLER
& VERTICAL
SPC OPTION AVAILABLE

Specifications	Century
Colour Range	8
Dim Out	Light Filtering
Composition	100% Polyester
Exterior Colour	Self-coloured
Roller Width	2m
Roller Roll Length	20m
Vertical Louvre Widths	89mm, 127mm
Vertical Roll Length	100m
Weight	300g/m
Thickness	0.76mm
Blind Types	Roller, Panel, Vertical
Colour Fastness (scale of 8)	6-8 - BS EN ISO 105-B02-2014
Flammability Standard	BS 5867 Part 2 Type B
Environmental Certification	OEKO-TEX® STeP Greenshield - VOC Safe Fabrics
Bacteria & Fungal Resistant	ASTM G21, Ultra-Fresh*
Cleaning	Gently wipe clean with a soft, damp cloth. Allow to dry in down position.

*Ultra-Fresh is a registered trademark of Microban Products Company

Solar, Optical & Colour Fastness Properties

	Solar			Visual			UV Block	CF	DP	SC - EN 14501					Gtot				
	Rs	As	Ts	Rv	Tv	Av				A	B	C	D	E	A	B	C	D	E
Chalk	75	11	14	82	6	12	100	7	0	0.33	0.37	0.37	0.28	0.37	0.29	0.32	0.33	0.24	0.32
Charcoal	41	53	6	15	85	0	100	6	0	0.55	0.56	0.50	0.31	0.48	0.48	0.49	0.44	0.27	0.42
Flint	56	36	7	41	59	0	100	7	0	0.45	0.47	0.44	0.30	0.43	0.39	0.41	0.39	0.26	0.37
Jet Black	33	63	4	7	93	0	100	7	0	0.61	0.61	0.53	0.32	0.51	0.53	0.53	0.46	0.28	0.44
Parchment	64	28	9	58	40	3	100	6	0	0.40	0.43	0.42	0.29	0.41	0.35	0.37	0.36	0.25	0.35
Royal Blue	37	57	6	11	90	0	100	7	0	0.58	0.58	0.51	0.32	0.49	0.50	0.51	0.45	0.28	0.43
Silver	53	44	4	54	44	2	100	8	0	0.47	0.49	0.46	0.30	0.44	0.41	0.43	0.40	0.26	0.38
White	78	9	13	85	4	11	100	6	0	0.32	0.35	0.36	0.28	0.36	0.28	0.30	0.32	0.24	0.31



Solar Gain: The amount of heat increase resulting from solar energy entering a room. It is the total of three separate parts - the amount of energy transmitted directly into the room, the energy which is absorbed by the blind and the proportion of energy which is absorbed by the window.

R: % of reflected heat and light. **A:** % of absorbed heat and light. **T:** % of transmitted heat and light. **UV Block:** the % of UV light blocked by the fabric.

Colour Fastness (CF): Scale of 8, BS EN ISO 105-B02-2014. **Darkening Performance (DP):** Scale of 0-4. 0: lowest opacity 4: highest. A rating of 4 indicates the product is completely opaque with no pinholes or light transfer.

Shading Co-efficient (SC): The solar heat gain with the blind at the window divided by the solar heat gain with no blind at the window. The lower the shading co-efficient, the higher the efficiency of the fabric.

Gtot: Amount of heat entering through the glazing and shading combined.

Glazing system (EN 410)
A: Clear Single Glazing.
B: Clear Double Glazing.
C: Clear Double Glazing Low Emissivity.
D: Solar Control Double Glazing Low Emissivity.
E: Triple Glazing.

CENTURY



Dearnleys

t: 01924 371 791 e: info@dearnleys.com

Units 1 - 4, Sirdar Business Park, Flanshaw Lane, Wakefield, WF2 9HX

www.dearnleys.com

Pentel

t: 0161 872 7642 e: info@pentel-contracts.com

2nd Floor, Lowry Mill, Lees Street, Swinton, Manchester, M27 6DB

www.pentel-contracts.com